


Rivetti in lega di alluminio

D mm	L mm	D1 mm	Diametro del foro mm	Spessori serrabili mm	Carico di rottura a trazione	Carico di rottura a taglio
2,4	6	5	2,5	0,5 ÷ 3	440 N	350 N
	8			3 ÷ 5		
	10			5 ÷ 7		
	12			7 ÷ 9		
3	5	6	3,1	1 ÷ 2	800 N	660 N
	6			2 ÷ 3		
	8			3 ÷ 5		
	10			5 ÷ 7		
	12			7 ÷ 9		
	14			9 ÷ 11		
	16			11 ÷ 13		
18	13 ÷ 15					
3,2	6	6,5	3,3	0,5 ÷ 3	950 N	680 N
	8			3 ÷ 5		
	10			5 ÷ 7		
	12			7 ÷ 9		
	14			9 ÷ 11		
	16			11 ÷ 13		
3,4	6	7	3,5	0,5 ÷ 3	1500 N	850 N
	7			3 ÷ 4		
	9			4 ÷ 6		
	11			6 ÷ 8		
	12			8 ÷ 9		
	14			9 ÷ 11		
	16			11 ÷ 13		
	18			13 ÷ 15		
4	5	8	4,1	0,5 ÷ 1,5	1850 N	1300 N
	6			1,5 ÷ 2,5		
	8			2,5 ÷ 4,5		
	10			4,5 ÷ 6,5		
	12			6,5 ÷ 8,5		
	14			8,5 ÷ 10,5		
	16			10,5 ÷ 12,5		
	18			12,5 ÷ 14,5		
	20			14,5 ÷ 16,5		
	25			16,5 ÷ 21,5		
	30			21,5 ÷ 26,5		
4,8	6	9,5	5	0,5 ÷ 2	2950 N	2170 N
	8			2 ÷ 4		
	10			4 ÷ 6		
	12			6 ÷ 8		
	14			8 ÷ 10		
	16			10 ÷ 12		
	18			12 ÷ 14		
	20			14 ÷ 16		
	25			16 ÷ 21		
	30			21 ÷ 26		
	35			26 ÷ 31		
	40			31 ÷ 36		
	50			41 ÷ 46		
6	8	12	6,1	2 ÷ 3	3700 N	2500 N
	10			3 ÷ 5		
	12			5 ÷ 7		
	15			7 ÷ 10		
	18			10 ÷ 13		
	22			13 ÷ 17		
	26			17 ÷ 21		
	30			21 ÷ 25		
	35			25 ÷ 30		
	40			30 ÷ 35		

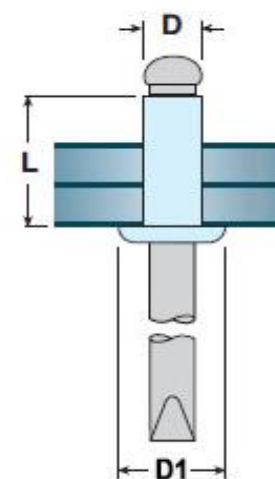

Rivetti in lega di alluminio

D mm	L mm	D1 mm	Diametro del foro mm	Spessori serrabili mm	Carico di rottura a trazione	Carico di rottura a taglio
6,4	8	13	6,5	2 ÷ 3	4950 N	3200 N
	10			3 ÷ 5		
	12			5 ÷ 7		
	15			7 ÷ 10		
	18			10 ÷ 13		
	22			13 ÷ 17		
	26			17 ÷ 21		
	30			21 ÷ 25		
	35			25 ÷ 30		
40	30 ÷ 35					
7,8	15	14	8	4 ÷ 9	8750 N	5500 N
	18			9 ÷ 12		
	22			12 ÷ 16		
	26			16 ÷ 20		